


Standard Lengths: (Other lengths available upon request)

- 01: 304.8 mm ± 12.7 mm
- 02: 609.6 mm ± 12.7 mm
- 03: 914.4 mm ± 12.7 mm
- 04: 1219.2 mm ± 25.4 mm
- 05: 1524.0 mm ± 25.4 mm
- 06: 1828.8 mm ± 25.4 mm
- 07: 2133.6 mm ± 25.4 mm
- 10: 3048.0 mm ± 50.8 mm
- 14: 4267.2 mm ± 50.8 mm
- 15: 4572.0 mm ± 50.8 mm
- 20: 6096.0 mm ± 50.8 mm
- 25: 7620.0 mm ± 50.8 mm
- 35: 10668.0 mm ± 76.2 mm
- 50: 15240.0 mm ± 76.2 mm
- 75: 22860.0 mm ± 76.2 mm
- 100: 30480.0 mm ± 101.6 mm

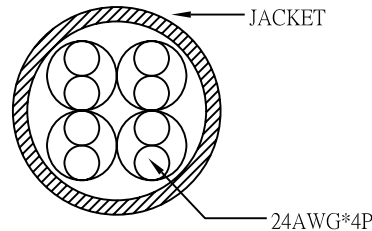

SECTION A-A

NOTES:

CABLE: 24AWG(7/0.196±0.01mm)*4P(BARE)
 INSULATION: HD-PE OD=Ø1.0±0.05MM
 COLOR:BLUE&WHITE/BLUE, ORANGE&WHITE/ORANGE,
 GREEN&WHITE/GREEN, BROWN&WHITE/BROWN
 JACKET:80°C PVC OD=Ø5.3±0.3MM
 JACKET COLOR(Pantone #):BLUE (300U), BLACK (Black 2C 2X), GRAY (401C),
 GREEN (3415C), ORANGE (165C), PURPLE (525C), RED (187C),
 WHITE (White), YELLOW (129C), DARK GRAY (Cool Gray 11C)
 MARKING*: RoHS COMPLIANT 500MHZ PATCH CABLE 24AWG 4PR
 TYPE CM 60C 30V LL212720 CSA AWM I A 80C 30V FT1
 UL Verified to ISO/IEC 11801 AND TIA/EIA 568B-2.1 CAT 6 at 100 meters
 ETL Verified to ISO/IEC 11801 AND TIA/EIA 568B-2.1 CAT 6 at 100 meters

RJ45 PLUG	WIRE COLOR	RJ45 PLUG
1	WHITE/ ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
4	BLUE	4
5	WHITE / BLUE	5
6	GREEN	6
7	WHITE / BROWN	7
8	BROWN	8

TEST CONDITION: LOW-PRESSURE 15V		
INSULATION: UPON 1M ohm AND 1M ohm - ELECTRIC CONDUCTION:INSIDE 1.5Kohm		
2	CONNECTOR: RJ45 Long Plug	2PCS
1	CABLE: 24AWG*4P+1, OD: 5.3mm, JACKET COLOR: as listed above	1PCS
ITEM NO	PART NAMES	QTY

THIS PRODUCT IS RoHS COMPLIANT



PRODUCT	RJ45 PLUG TO RJ45 PLUG CAT6 PATCH CABLE	CUSTOMER		DRAWN	J.C.B.	 THREE ANGLE PROJECTION
CUS,NO	CAT6-XX-XX CC = Color, XX = Length	VERSION		CHECKED	H.J.M	
DR,NO		DRAWN DATE	15 OCT 2006	APPROVED		