



Rev.	Description	By	Date

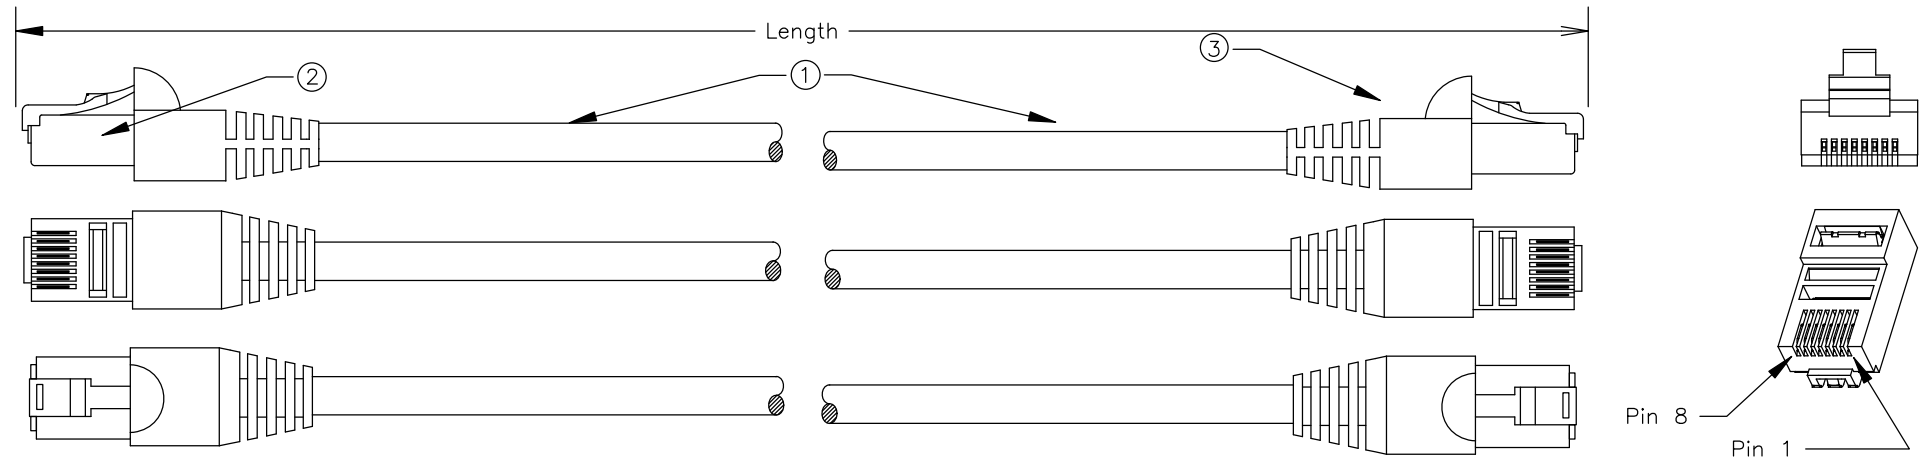

- Applications**
- Gigabit Ethernet 1000 Base-T
 - Fast Ethernet 100 Base-T
 - Ethernet 10 Base-T
 - 4/16 Mbps Token Ring 802.5
 - 100 VG-Any Lan
 - 100 Mbps; 55-155-622 Mbps ATM
 - Voice
 - Broadband video
 - Applications developed for operation over CAT5E or class D cabling

- Standards compliance and Listings**
- UL Listed
 - ANSI/TIA/EIA-568-A
 - ANSI/TIA/EIA-568-A-1
 - ANSI/TIA/EIA-568-A-2
 - ANSI/TIA/EIA-568-A-3
 - ANSI/TIA/EIA-568-A-4
 - ANSI/TIA/EIA-568-A-5
 - ANSI/TIA/EIA-568-B-1, CAT5E
 - ANSI/TIA/EIA-568-B-2, CAT5E
 - ATSM D 4566-98
 - ISO/IEC 11801
 - Proposed ISO/IEC 11801 2nd edition, Class D & CAT5E

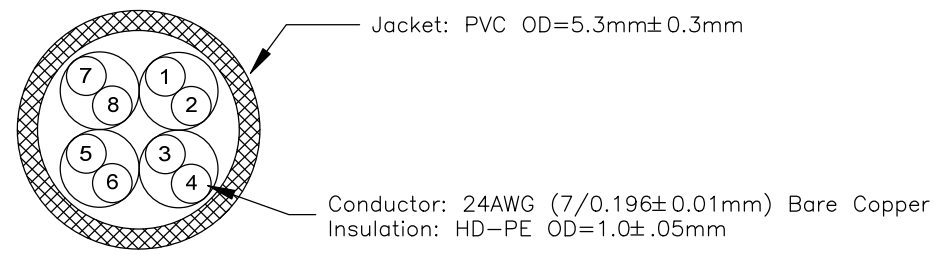


Wire Map

P1	Color	P2
1	White/Orange	1
2	Orange	2
3	White/Green	3
4	Blue	4
5	White/Blue	5
6	Green	6
7	White/Brown	7
8	Brown	8

Part Number Matrix

ECAT5-4PR-(LL)-(CCB)
Replace (LL) with length
Replace (CC) with Jacket Color
JACKET COLOR CODE
YE = YELLOW
BK = BLACK
RD = RED
GR = GREEN
BL = BLUE
GY = GRAY
WH = WHITE
OR = ORANGE
PU = PURPLE

Item	Description	Qty
1	Cable: CAT5E UTP 24AWG (7/0.196±0.01mm) x 4P(Bare)	AR
2	Connector: High Performance CAT5E RJ45 Long Body Plug	2
3	Strain Relief Boot: Slide on Boot - Bubble Style	2

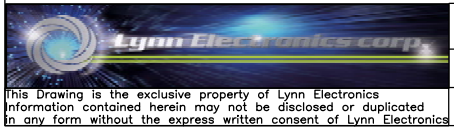

Drawing No: ECAT5-4PR-XX-XXX	Desc: CAT5E RJ45/45 Patch Cord, 568B, Slide on Bubble Boot
Drawn By: J.Riling	
Drawing Date: 07/15/2008	Checked By: D.Phillips
	Uncontrolled Copy

Sheet: 1/1	UNLESS OTHERWISE SPECIFIED DIM. ARE IN INCHES-TOL. ON FRACTIONS: DECIMALS: ANGLES: ± ~ .XX .01 ±1/2 :XXX005 ±1/2
Unit: FT	
Scale: N/A	THIRD ANGLE PROJECTION